



PORTABLE BATTERY POWER ROCKET 4000



User Manual

DA-11101


PRODUCT SPECIFICATION

| | |
|-----------------------|------------------------------------|
| Suitable for | Mobile phones and digital products |
| Input voltage | DC5V |
| Input current | 800 mA (MAX) |
| Output voltage | DC 5V - 5.5V |
| Output current | 1000 mA (MAX) |
| Capacity | 4000 mAh |
| Product weight | 68g |
| Product dimensions | 86mm (L) x 40mm (W) x 27mm (H) |
| Operating temperature | -10°C - 60°C |
| Storage temperature | -10°C - 45°C |

MAINTENANCE

Keep your power bank operating to its full potential by following these three steps:


1. Recharge your power bank once every three months when it is not in use
2. Keep the power bank away from any moist environment and corrosive material
3. Never wash the power bank with any chemicals, soaps, or detergents

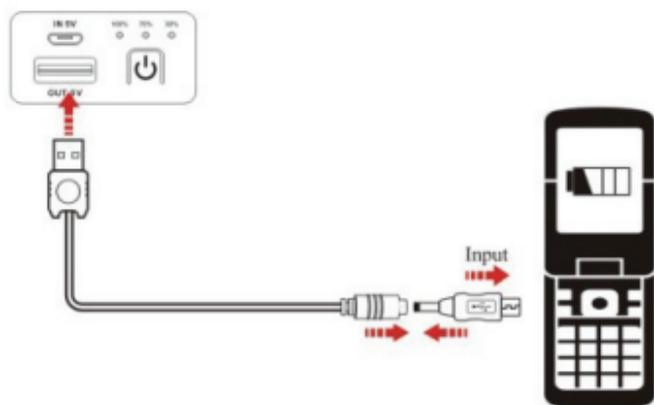

HOW TO USE

1. Simply use the attached USB cable to charge the digital product. Connect one end of the USB cable with the output port of the power bank; connect the other end with the digital product with the converted tip. Press the "On" button once to turn it on. It will start to charge and the green LED will indicate the charging process.
2. If the charging process is finished, or a failure occurs by connecting the digital product, the green LED will stop flashing and the power bank will turn off automatically after 30 seconds.
3. 30%, 70%, 100% are the three capacity indicators. When the 30% indicator light is on, it means low power. Please charge the power bank in time.


Note: If the product is overloaded, the safety cut-out will kick in and the power bank will go into protected mode. To return to normal mode, simple charge the power bank:

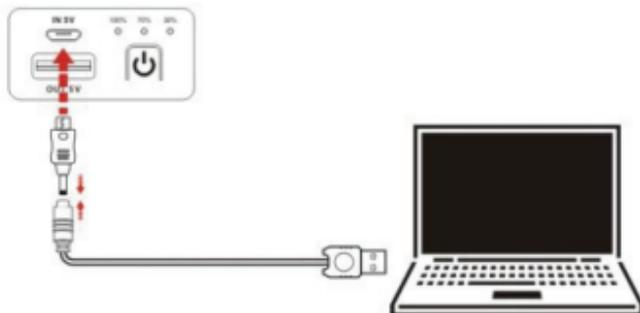

HOW TO CHARGE THE POWER BANK

The "IN" port is the charging port of the power bank. The capacity indicator will flash when charging the power bank, and the 100% indicator will turn on after full charging.

UNIT VIEW DESCRIPTION

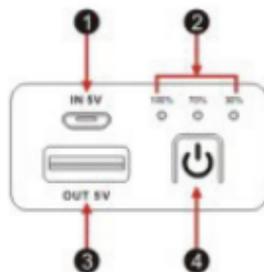

1. Input port
2. Capacity indicator
3. USB output port
4. ON button