
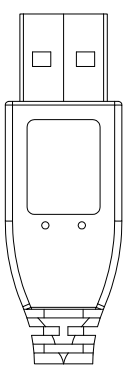

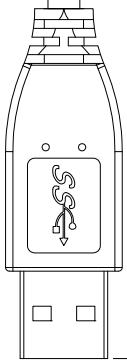
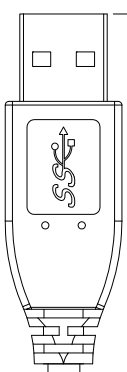


Signature	Date	Rev.
Norman Xu	Apr.15.2009	01
Norman Xu	Revision History	
For Bulk Production		
edit cable to full pin out and cable spec		
Norman Xu	Apr.15.2009	01

USB 3.0 A/M 9PIN  
INS:BLUE(PT 300C)

USB 3.0 A/M 9PIN  
INS:BLUE(PT 300C)

L=1,800±30MM



1 2 3 4 5 6 7

- E**
- CABLE: UL-2725 [#28(7/0.127 T.C)\*1P INS:Foam-PE+D.W(7/0.127 T.C)+AL/MY  
+Hot-melt-Mylar]\*2C+#28(7/0.127 T.C)\*1P INS:Polyolefin  
+#28(7/0.127 T.C)\*2C INS:Polyolefin + AL/MY + B.D(85%)  
PVC JACKET; OD:5.2±0.15mm COLOR:BLACK , REV 3.0.
  - CONNECTOR:  
P1 & P2: USB 3.0 A/M 9PIN CONTACT:30u",SHELL:NI-PLATED.
  - HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK.
  - ELECTRICAL TEST:  
(1)100% OPEN SHORT & MIS WIRE TEST.  
(2)CONTACT RESISTANCE 3 ohm Max.  
(3)INSULATION RESISTANCE 10M ohm Min.  
(4)HI-POT DC300V
  - PACKING: 1PC EACH POLY BAG WITH ASSMANN EAN CODE & PART NO.

PIN OUT	
P1	P2
1 RED	1 VCC
2 WHITE	2 -DATA
3 GREEN	3 +DATA
4 BLACK	4 GND_pwrRt
5 BLUE	8 SDP1-
6 YELLOW	9 SDP1+
7 D.W	7 SDP1_Drain
8 PURPLE	5 SDP2-
9 ORANGE	6 SDP2+
SHELL B.D	SHELL

Date	Name
Apr.15.2009	Norman Xu
Apr.15.2009	T. Aufemann
Approved by	

Part No.	<b>AK-112311</b>
Title:	USB 3.0 AM to AM cable

**ASSMANN**  
Electronic GmbH

Scale	N/A	Sheet	1/1
Unit	MM		

1 2 3 4 5 6 7

STR1407

H G F E D C B A