



## Modular Cable, flat, black


### Technical Features

Conductor	Copper 7x0.1mm
Insulation	PVC Ø 0.9 mm
Outer jacket	PVC 4.7x2.3mm
Package	100m roll

### Electrical Properties

DC resistance	32 $\Omega$ / 100 m at 20 °C
Resistance unbalance	max. 5 % at 20 °C
Insulation resistance (500V)	min. 500 M $\Omega$ /Km at 20 °C

### Technical Drawings

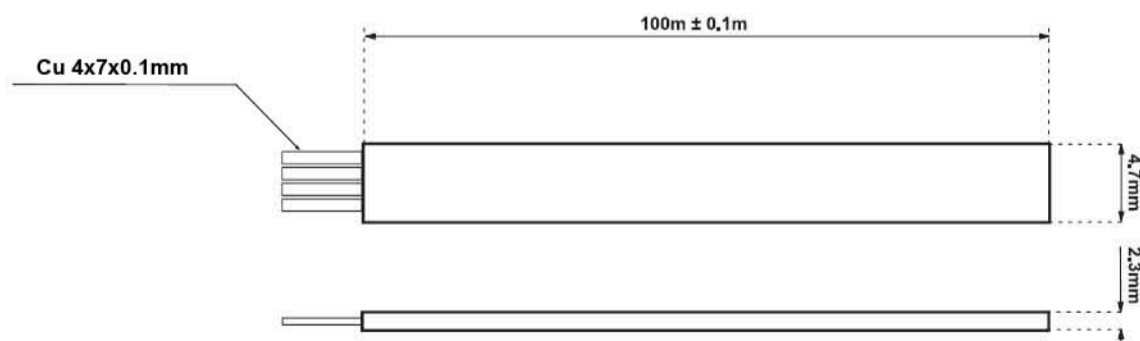

RoHS  
compliant

