





P1

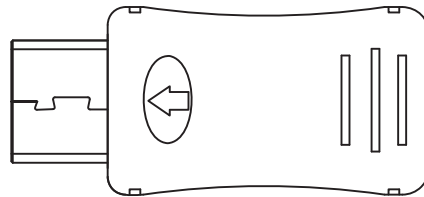

6.9±0.05

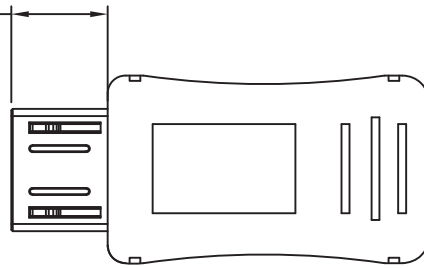

P2




ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:1 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

Pin Assignment


P1	_____	P2
1	_____	1
2	_____	2
3	_____	3
5	_____	5
Shell	_____	Shell

PACKING: 1PCS/PE BAG + LABEL

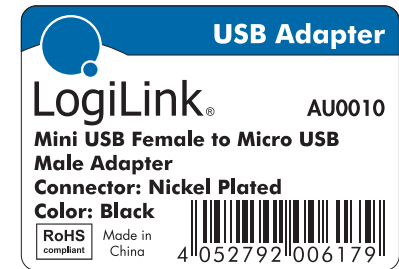


Color: Pantone 2945C, Black
Label Size: 50 x 35 mm R= 2mm

					TOLERANCE			<div style="text-align: center;">2Direct GmbH</div>			
					INCHES		M/M				
					.X	.015	.30				
					.XX	.010	.10				
4	Cover	Micro to Mini ABS Cover	1	set	.XXX	.005	.05	TITLE: Micro USB TO Mini USB 5P Adapter			
3	Shell	Mini USB 5P Female Solder Type, Ni Plated, Black Insulation	1	pcs	DRAWN BY	CUSTOMER :		REV. A			
2	Connector	Micro USB(B) 5P Male Solder Type, Ni Plated, Black Insulation	1	pcs		CHECK BY	CUSTOMER NO.: AU0010				
1	Cable	28AWG BLACK L=20MM	4	pcs			SCALE				NONE
NO	ITEM	DESCRIPTION	Q'TY	UNIT	APPD BY	UNIT	MM	DATE	2010.12.02	1/2	

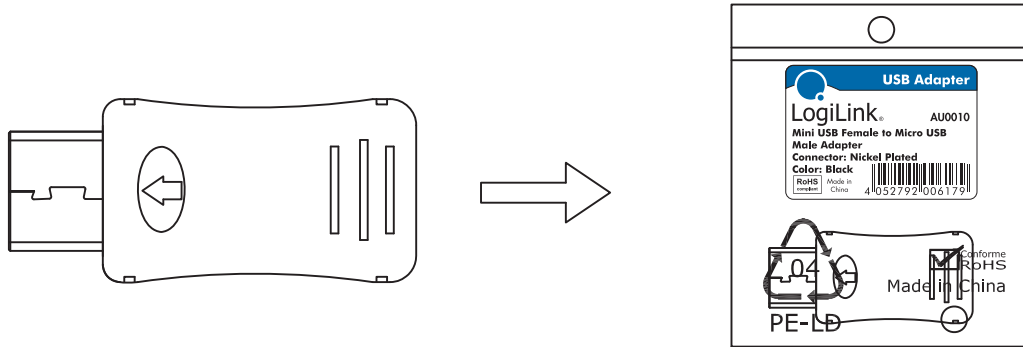


Each PCS installed a zip lock bag


Positive:

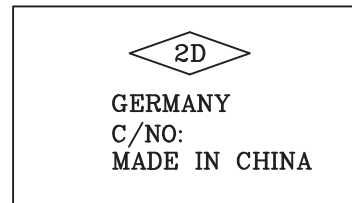

Side:



Lable

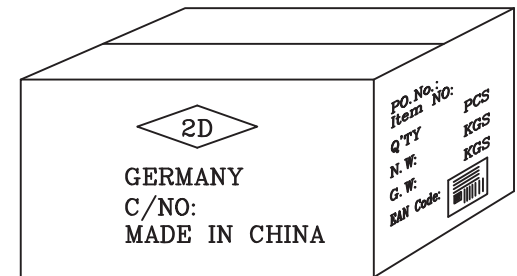

⊕	TOLERANCE		2Direct GmbH	
	INCHES	M/M		
.X	.015	.30	TITLE: Micro USB TO Mini USB 5P Adapter	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY			CUSTOMER :	
CHECK BY			CUSTOMER NO.:	AU0010
APPD BY	SCALE	NONE		REV. A
	UNIT	MM		
	DATE	2010.12.02		2/2