



## USB3.0 Keystone Coupler, Type A F/F

### Technical Features

USB 3.0 Type A front and rear jacks


Suitable for keystone panels and outlets

Snap-in mounting, easy installation

Nickel-plated contact

Thermoplastic housing

### Technical Drawings

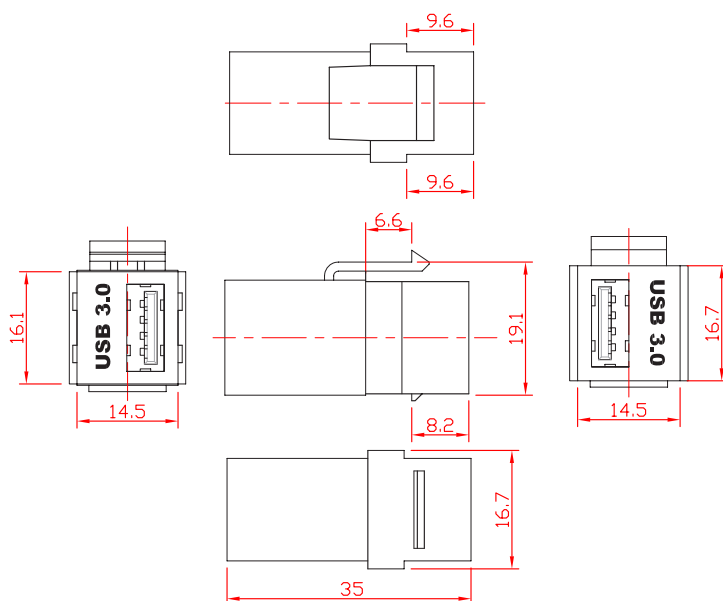

### Electrical:

1. Voltage rating: 125 VAC RMS
2. Current rating: 1.5AMP
3. Contact resistance: 1000 MEGOHMS MIN @500 VDC
4. Dielectric strength: 750 VAC RMS 60Hz, 1 MIN

### Environmental:

1. Storage: -40° to +85°
2. Operation: 0° to 70°

[www.logilink.com](http://www.logilink.com)



RoHS  
compliant



Part no.	Color	EAN Code
NK0015	White	4052792028430
NK0015B	Black	4052792043785

## Package Contents

1 x USB3.0 Keystone Coupler, Type A F/F

## Packaging Informations

Packing Dimension	110 x 80 x 20mm
Packing Weight	0.01kg
Carton Dimension	465 x 320 x 275mm
Carton Q'ty	1000pcs
Carton Weight	11.5kg



[www.logilink.com](http://www.logilink.com)



RoHS  
compliant



Made in China

\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered namework of their respective owners.