



NOTE:

- (1). Cable Spec: UL2725 28AWG (7/0.12mmCu)*1P+24AWG (7/0.20mmCu)*2C+ D(7/0.12CU) +Al-foil+B[16*3 (0.12) ALMG]
 Jacket Material:PVC OD:4.5±0.2mm
 Cable Colour: Black
 Cable Printing: USB 2.0 CABLE FULLY RATED
- (2). Connector A: USB 2.0 A Male Solder Type
 INSULATION:Black
 CONTACTS:Phosphor Bronze,Gold Plated
 SHELL:Brass,Nickel Plated
- (3). Connector B: MINI 5PIN Male Solder Type
 INSULATION:Black
 CONTACTS:Phosphor Bronze,Gold Plated
 SHELL:Brass,Nickel Plated
- (4). Over Molding colour: PVC-45P-Black
- (5). Parameter Settings: CT-8681FA
 1. Conductive Resistance:2.5Ω
 2. Insulative Resistance:5MΩ (Min.)
 3. 250V/AC, DC ,1.5mA/I ,50Hz ,0.03s
- (6). Packing: POLYBAG Packing

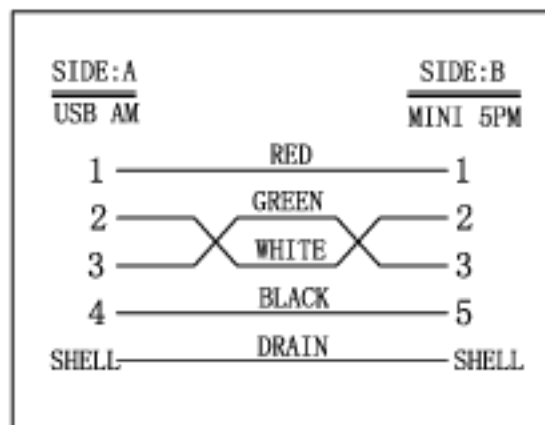

PIN OUT: (5)

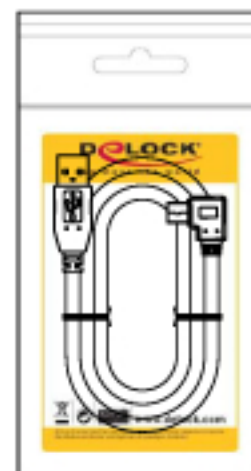

PACKING: (6)

82681

GENERAL TOLERANCES
(UNLESS SPECIFIED)

LENGTH: X ± 1
 . X ± 0.2
 . XX ± 0.10
 ANGLE: X° ± 1°
 . X° ± 0° 30'

UNIT:mm		REV:0/A		NAME		USB 2.0 AM/MINI 5PM	
DRAWING	OYF	2010/06/25	S. P. NO.	DWG. NO.			
CHECK			P. O. NO.	PAGE		1/1	
APPROVE			SIZE				

0		2010/06/25
REV	DESCRIPTION	DATE