
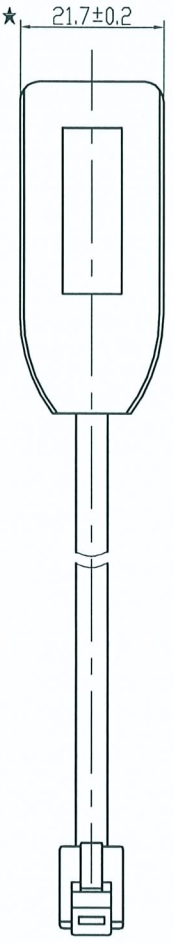

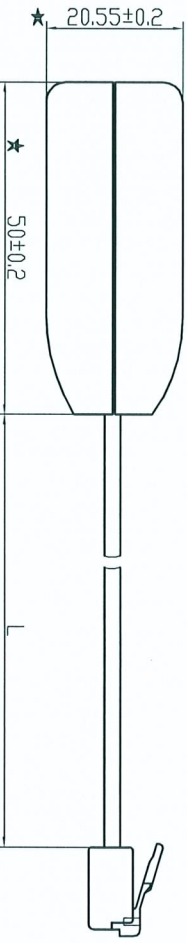


#05637

REV. ECN NO. DATE

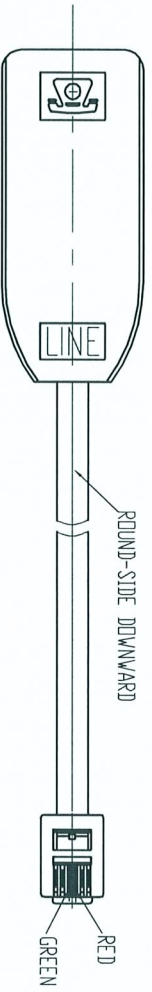

- NOTES:
1. ELECTRICAL:
 - 1.1 VOLTAGE RATING: 125 VAC RMS;
 - 1.2 CURRENT RATING: 15 AMP;
 - 1.3 CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - 1.4 INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - 1.5 DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 2. MECHANICAL:
 - 2.1 HOUSING: ABS, UL94V-0, IVDRY;
 - 2.2 INSERT: ABS, UL94V-0, IVDRY;
 - 2.3 5321 6P2C JACK, 3u";
 - 2.4 6P2C PLUG 3u";
 - 2.5 2C CABLE: JACKET: PVC
 - 2.6 DURABILITY: 750 CYCLES Min.
 3. * Critical Dimension.

RoHS Compliant

TOLERANCES		MATERIAL: SEE NOTES		NAME: 6P2C JUNCTION	
0-15±0.15	15-30±0.2	FINISH: SEE NOTES	Designed:	DWG NO.:	REV
>30±0.25	ANGLES: ±1°	CHECKED:	Approved:	PART NO.:	00
SCALE	UNIT	CUSTOMER:			
1:1	mm	MODEL NO.:			
FIRST ANGLE PROJECTION	SIZE				