


# DATASHEET

## Power Cable CEE7/7 90° - C13 180°, black

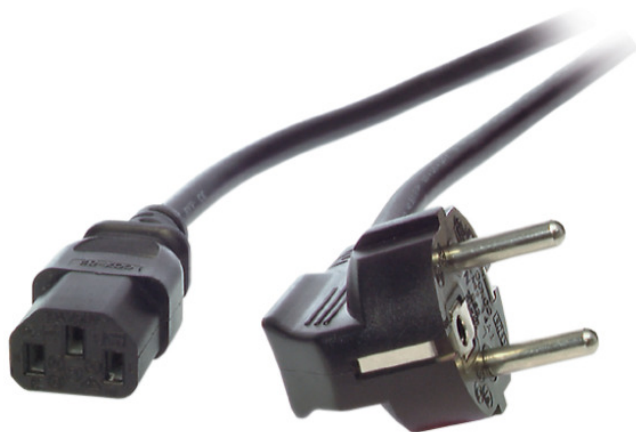

### Description

10 A / 250 V VDE tested  
 Colour black  
 Suitable for Germany, Belgium, France and further (see overview)

### General data

Connection 1	SCHUKO plug, angled
Connection 2	Cold device plug straight, female
Number of cores	3
Spiralized cable	False
Protective conductor	True
With cord switch	False
Colour outer sheath	Black

### Cable sheath

Material outer sheath	PVC
Temperature resistance	0 - 70 °C

### Electrical characteristics

Nominal voltage	250 V
-----------------	-------

### Standards, approvals, certifications

Oil resistant (acc. EN 60811-2-1)	False
-----------------------------------	-------

### Available variants

This datasheet was created automatically on 18-06-2020 . Technical changes reserved.



# DATASHEET

## Power Cable CEE7/7 90° - C13 180°, black

Article no.	Title	Nominal cross section conductor	Outer diameter approx.	Length
EK504.0,5	Power Cable CEE7/3 90° - C13 180°, black, 0.5 m, 3 x 0.75 mm <sup>2</sup>	0.75 mm <sup>2</sup>	6.8 mm	0.5 m
EK504.0,75	Power Cable CEE7/3 90° - C13 180°, black, 0.75 m, 3 x 0.75 mm <sup>2</sup>	0.75 mm <sup>2</sup>	6.8 mm	0.75 m
EK504.1	Power Cable CEE7/3 90° - C13 180°, black, 1.0 m, 3 x 0.75 mm <sup>2</sup>	0.75 mm <sup>2</sup>	6.8 mm	1.0 m
EK504.2	Power Cable CEE7/3 90° - C13 180°, black, 2.0 m, 3 x 0.75 mm <sup>2</sup>	0.75 mm <sup>2</sup>	6.8 mm	2.0 m
EK504.3	Power Cable CEE7/3 90° - C13 180°, black, 3.0 m, 3 x 1.00 mm <sup>2</sup>	1.00 mm <sup>2</sup>	7.1 mm	3.0 m
EK504.5	Power Cable CEE7/3 90° - C13 180°, black, 5.0 m, 3 x 1.00 mm <sup>2</sup>	1.00 mm <sup>2</sup>	7.1 mm	5.0 m
EK504.10	Netzkabel Europa CEE 7/7 90°/IEC 60320-C13,,1,5mm <sup>2</sup> , schwarz, 10m	1.50 mm <sup>2</sup>		10.0 m

Article no.	Title	Nominal cross section conductor	Outer diameter approx.	Length
EK504.1V2	Power cable CEE 7/7 90°-C13 180° black 1,0 m, 3 x 0.75 mm <sup>2</sup>	0.75 mm <sup>2</sup>	6.5 mm	1.0 m
EK504.2V2	Power cable CEE 7/7 90°-C13 180° black 2,0 m, 3 x 0.75 mm <sup>2</sup>	0.75 mm <sup>2</sup>	6.5 mm	2.0 m
EK504.3V2	Power cable CEE 7/7 90°-C13 180° black 3,0 m, 3 x 1.00 mm <sup>2</sup>	1.00 mm <sup>2</sup>	6.8 mm	3.0 m
EK504.5V2	Power cable CEE 7/7 90°-C13 180° black 5,0 m, 3 x 1.00 mm <sup>2</sup>	1.00 mm <sup>2</sup>	6.8 mm	5.0 m

This datasheet was created automatically on 18-06-2020 . Technical changes reserved.

