

Modular Cable, flat, white


Technical Features

Conductor	Copper 5x0.1mm
Insulation	PVC Ø 0.9 mm
Outer jacket	PVC 4.7x2.3mm
Package	100m roll

Electrical Properties

DC resistance	45 Ω / 100 m at 20 °C
Resistance unbalance	max. 5 % at 20 °C
Insulation resistance (500V)	min. 500 M Ω /Km at 20 °C

Technical Drawings

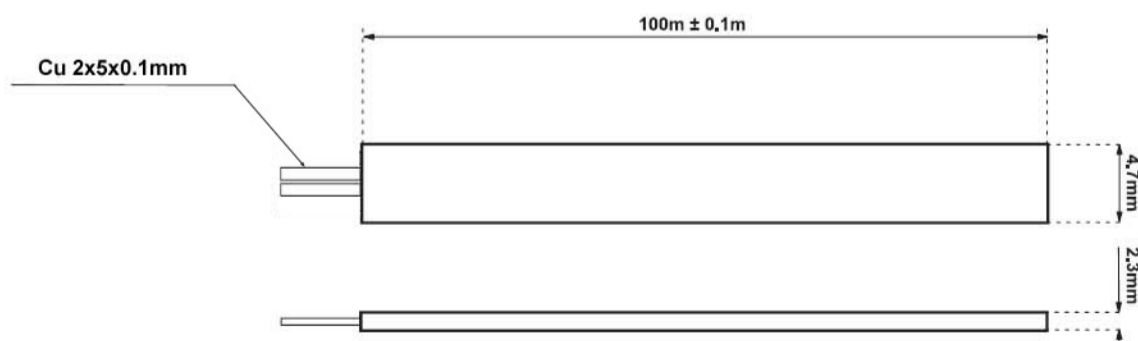

RoHS
compliant

